


OCC-B-FR-PX OIL CATCH CAN KIT

- Remove the standard rubber breather hose from rocker cover to air intake pipe.
- Working inside of the driver side front wheel arch measure and mark 25mm towards the rear of the vehicle from the plastic clip shown in photo. Measure and mark 30mm back from the first mark. Drill 2x ø7 holes in inner guard for vertical bracket.
- Bolt new catch can mounting bracket to vehicle with bolts nuts and washers as per picture.
- Screw 2 x fittings into catch can, the fitting in side is the outlet and top fitting is the inlet.
- Bolt catch can to mounting bracket using 4x m6 button head screws
- Cut standard hose and connect to catch can, rocker cover and air intake pipe.





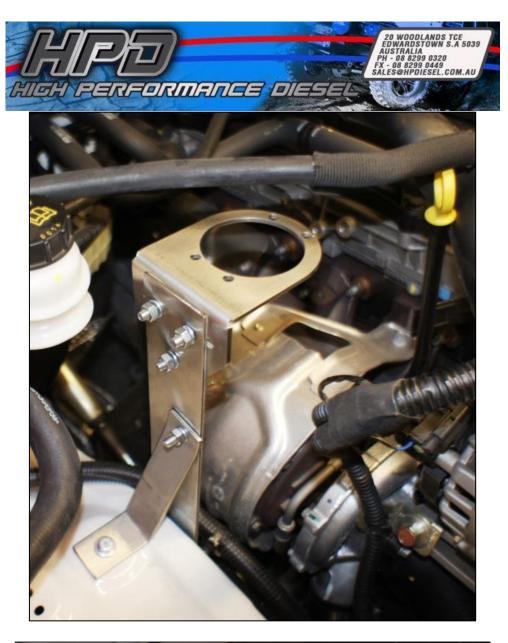



HPD OIL AIR SEPERATOR/CATCH CAN



The HPD oil air separator has been designed to significantly reduce the oil vapour from the rocker cover breather going into the intake of the turbo. The oil will build up in the intercooler and piping causing intercooler inefficiency. The evidence of this is oil leaking from the turbo charger and silicone hose joints. The HPD oil air separator eliminates the build-up of black sludge in the inlet manifold. This is caused by the mixing of oil from rocker cover breather and carbon from the EGR. This black sludge coats the entire inside of the inlet manifold and inlet ports in cylinder head and can eventually build up and restrict airflow. Which can eventually cause premature engine failure?

The HPD oil air separator has some unique features here are some of them.

- Internal stainless mesh filters that can be removed for cleaning.
- Dip stick to check oil level.
- Stainless steel mounting bracket and 4 bolts with 5 positions available.
- Simply unscrew base to empty oil.
- Screw in hose fittings are available in a variety of sizes 10, 12, 16, 19, 25.
- 360 swivel top outlet which allows hose to rotate to any position connects to inlet pipe
- Side inlet port connects to rocker cover.
- Vehicle specific kits including hoses clamps and mounting brackets.



FORD RANGER PX CATCH CAN

OCC-B-FR-PX



| QUANTITY | PART | DESCRIPTION | PACKED |
|----------|--------------|---------------------------------|--------|
| 1 | ОСС-В | BILLET CATCH CAN | |
| 1 | OCC-B1 | UNIVERSAL BRACKET FOLDED 90° | |
| 1 | OCC-FR-PX | FORD RANGER PX MOUNTING BRACKET | |
| | | 2 PIECES | |
| 4 | 6X12MG304BSS | M6X12 BUTTON HEAD SCREWS | |
| 1 | 6X16M88ZPB | M6X16 BOLT | |
| 6 | 6X20M88ZPB | M6X20 BOLT | |
| 7 | 6MZPW | M6 FLAT WASHER | |
| 7 | 6X2.5X2MSW | M6 SPRING WASHER | |
| 7 | 6M8ZPN | M6 ZINC PLATED NUT | |
| 2 | HTT-8J25 | Ø25 HOSE TAIL #8 ORING | |
| 2 | FBS 35-12 | SPRING CLAMP TO SUIT Ø25 HOSE | |